-




Installation Manual Double-DIN

- Mercedes A-Class (W169) 2005->
- Mercedes B-Class (W245) 2005->
- Vito/Viano 2006-> Typ W639/V639

colour: black 381190-36-1 colour: rubber-touch 381190-36-2

Compatible with double DIN devices

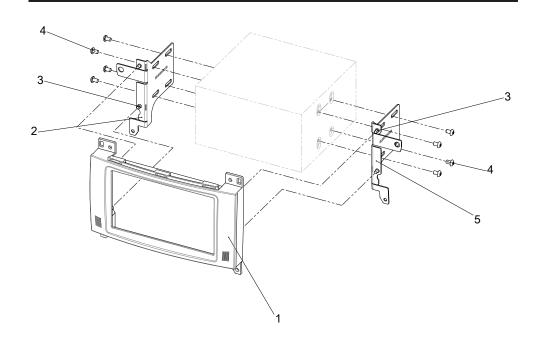

- (1) Facia Plate
- (2) Mounting Bracket Left
- (3) countersunk flat head tapping screw
- (4) flat headed screw
- (5) Mounting Bracket Right

Mercedes A-Class / B-Class



1. Insert pulling hooks into air vent catches. Pull out air vents



2. Disconnect plugs for hazard light switch




3. Remove air vents completely



4. Unclip and remove lower panel

•••••		
•		
•		

Mercedes Viano / Vito

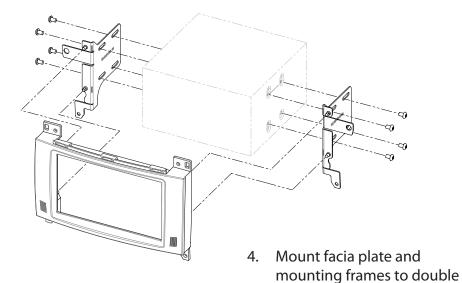

Connect all required circuit points and push double DIN head into dash board


DIN head unit

Mercedes A-Class / B-Class



5. Remove four torx screws

Remove OEM head unit

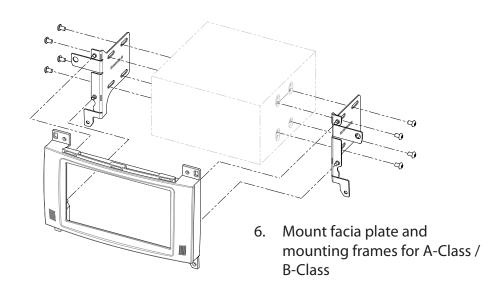

Mercedes A-Class / B-Class



7. Connect all required circuit points and push double DIN head into dash board

Reinstall everything in reverse order to finish installation.

Mercedes Viano / Vito



1. Vehicle with OEM head unit.

Remove OEM trim panel surrounding the radio.



2. Remove the four screws at the top and bottom of OEM head unit.



B. Remove the OEM head unit.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidential or indirect damages.