



Installation Manual Double DIN Kit

Rubber-Touch: 391143-30-1-1

• Hyundai i30 with automatic air condition

Compatible with double DIN devices



Double DIN Kit contents

- (1) Facia Plate
- (2) Mounting Brackets

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*


Installation Manual Double DIN Kit



1. Models with pocket: (top of dash board): Open pocket, remove 4 screws, take out pocket, remove screw that becomes visible.

Unclip the trim frame surrounding the OEM head unit and remove it by pulling it towards your direction.



2. Remove the OEM Radio, fixed by 4 screws (see arrows).

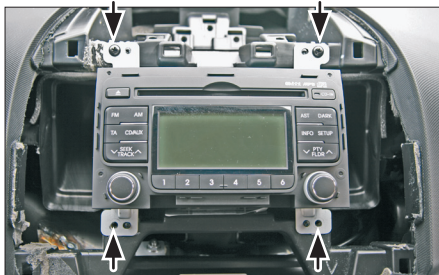

3. Remove all white clips (see arrows) from the OEM panel and put them on the new fascia plate.


- 3a. Remove air vents and climate control unit.

Mount both to the new fascia plate.

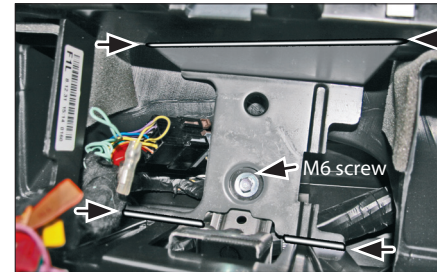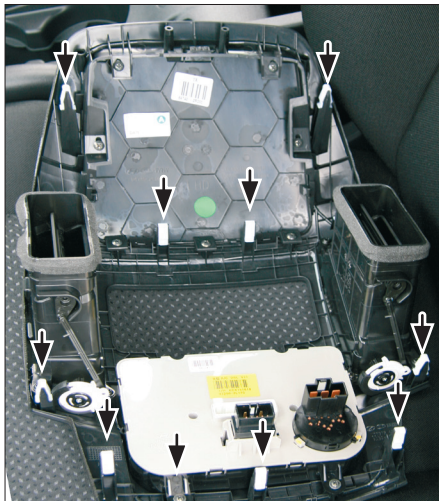

4. Remove the M6 screw

Cut the plastic frame at these lines and remove it (see arrows)

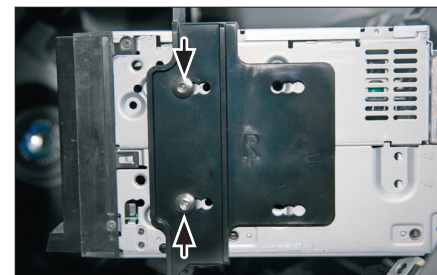

5. Put the mounting brackets on the Double-DIN head unit and fix it with the supplied screws.



6. Place the Double-DIN head unit at the dashboard and fix it with the 4 original screws.

Connect all required circuit points and place the trim frame to finish installation.